



Broadband

Wire & Cable Tool Catalog



CATV • Fiber Optic • Telecom
Wireless • Satellite • Electronics



Innovating Tools Since 1936

We are a quality product design and manufacturing company founded and based in the U.S. for over 80 years. With a full line of wire and cable preparation tools, we are proud to serve technicians and installers across a variety of global markets including in the CATV, telecommunications, electrical, wireless, fiber optic and utility industries.

Ripley® Tool Brands Promote Job Safety, Efficiency & Reliability

Cablematic®

Durable, professional-grade tools designed to prepare coaxial trunk and distribution, drop and messengered cables.

Miller®

A global brand of choice by installers and technicians for precision fiber optic cable preparation tools developed in close collaboration with fiber manufacturers.

ODM®

Our new electronics brand provides innovative, user-friendly and economical optical test and inspection equipment, as well as superior technical support. *A fiber optic testing catalog is available upon request.*

UtilityTool®

Tools designed to increase user safety and reduce costs by achieving quick, accurate cable splices and unions. *A power utilities catalog is available upon request.*

Customer Service & Technical Support

Our knowledgeable customer support team is available to answer product questions and provide unparalleled support.



Call Us:

(800) 528-8665



Email Us:

csr@ripley-tools.com
tech.support@ripley-tools.com



Download:

Find instruction guides online at www.ripley-tools.com



**CONNECT
WITH THE TOOLS
THAT LAST**

Table of Contents

Coaxial Cable	4	Fiber Optic Cable	24	General / Electrical	44
STRIPPING TOOLS	4	STRIPPING & CUTTING TOOLS	24	STRIPPING & CUTTING TOOLS	44
Coring & Stripping.....	4	Fiber Optic Strippers.....	24	Wire Strippers.....	44
Stripping & Chamfering.....	7	Stripping & Cutting Combo Tools.....	26	Stripping & Slitting Tools.....	45
Drop Trimmers.....	10	Fiber Optic Scribes & Cleavers.....	27	Cable Strippers.....	46
CUTTING TOOLS	12	Kevlar® & Electronics Cutters.....	28	Utility Cutters, Knives & Scissors.....	47
Coax Cable Cutters.....	12	SLITTING & SHAVING TOOLS	29	Pliers.....	48
Specialty Cutters.....	12	Buffer Tube Shavers.....	29	Tweezers & Anti-Wicking Tools.....	48
SLITTING & SHAVING TOOLS	13	Fiber Optic Cable Slitters.....	31	OTHER HAND TOOLS / ACCESSORIES	49
Messengered Web & Drop Cable Slitters.....	13	CONNECTOR TOOLS	34	De-Soldering Guns.....	49
COMPRESSION & CRIMPING TOOLS	14	CLEANING & POLISHING TOOLS	35	Work Mats & Accessories.....	49
Compression Tools.....	14	Cleaning & Polishing Tools.....	35		
Crimping Tools.....	16	INSPECTION & TESTING TOOLS	37	Appendix	50
INSERTION & EXTRACTION TOOLS	17	Optical Power Meters.....	37	REFERENCE	50
TORQUING & TERMINATION TOOLS	18	Optical Light Sources.....	38	Cable Construction.....	50
Torque Wrenches.....	18	Inspection Scopes.....	39	Product Index.....	51
Can Wrenches & Trap Wrenches.....	20	Fiber Identifiers.....	40	Part No. Index.....	54
Termination Tools.....	21	All-In-One Inspection & Test Sets.....	41		
CLEANING, FLARING & DEBURRING TOOLS	22	Optical Time Domain Reflectometers (OTDRs).....	41		
Flaring & Deburring Tools.....	22	General Fiber Optic Test Kits.....	42		
Conductor Cleaning Tools.....	22	Other Testing Tools.....	42		
TESTING TOOLS	23	Accessories.....	43		
Continuity Testers.....	23				

Coring & Stripping

QCST Series

Quick-Change Coring, Stripping & Chamfering Tool

- All-in-one tool quickly strips the jacket, bevels the aluminum sheath & cores the dielectric on trunk in one precise operation with its replaceable heat-treated sheath cutting blade
- Conveniently attaches the QJST Series jacket stripper body to the main coring & stripping tool body with a quick-change rotating body ring design
- Durable, all-metal construction with color-coded body & guide sleeves provide easy identification
- Chamfered strip stop is factory-set with a 1" (25.4 mm) strip length for 412 through 750 cable sizes or a 1 1/16" (27 mm) strip length for 840 through 1160 cable sizes
- Standard models feature a "T" handle with a built-in 3/8" drill adapter & ratchet models feature a ratchet "T" handle with a separate 3/8" drill adapter for manual or drill operations
- U.S. Patent No. D431,441



CABLE SIZE	CABLE COMPATIBILITY			"T" HANDLE	MODEL	PART #	BODY COLOR	GUIDE SLEEVE PART #	CORING BIT KIT MODEL / PART #	CHAMFERED STRIP STOP PART #	BLADE MODEL / PART #	LENGTH	WEIGHT
	COMMSCOPE® P3	TIMES FIBER											
		TX	TIO										
412	•		•	Standard	QCST 412T	36890	Black	29104	CB 114K 31220				
				Ratchet	QCST 412T-R	36900							
500	•		•	Standard	QCST 500T	36891	Red	29105	CB 115K 31320	34942			
				Ratchet	QCST 500T-R	36901							
565	•	•		Standard	QCST 565	36894	Red	29108	CB 146K 31325				
				Ratchet	QCST 565-R	36904							
625	•		•	Standard	QCST 625T	36892	Blue	29106	CB 116K 31420				
				Ratchet	QCST 625T-R	36902							
700	•	•		Standard	QCST 700	36895	Blue	33847	CB 137K 33858	34943	CB 60 14907	8.1" (206 mm)	1 lb 4 oz (525 g)
				Ratchet	QCST 700-R	36905							
750	•		•	Standard	QCST 750T	36893	Green	29111	CB 117K 31520				
				Ratchet	QCST 750T-R	36903							
840	•	•		Standard	QCST 840	36896	Green	29109	CB 138K 31531	34927			
				Ratchet	QCST 840-R	36906							
875	•		•	Standard	QCST 875T	36897	Yellow	29112	CB 118K 31620				
				Ratchet	QCST 875T-R	36907							
1000	•		•	Standard	QCST 21000T	36898	Orange	29113	CB 119K 31720				
				Ratchet	QCST 21000T-R	36908							
1160	•	•		Standard	QCST 21160	36899	Silver	33837	CB 158K 32385	34927	CB 26 14403		
				Ratchet	QCST 21160-R	36909							

QRT Series

Coaxial Coring & Stripping Tool

- Kits include JST-QR Series jacket stripping tool & CST-QR Series coring/stripping tool where the JST-QR conveniently snaps into the CST-QR for easy storage
- Heat-treated sheath cutting blade produces a smooth, beveled edge & can be replaced
- Standard models feature a "T" handle with a built-in 3/8" drill adapter & ratchet models feature a ratchet "T" handle with a separate 3/8" drill adapter for manual or drill operations



CABLE SIZE	HANDLE	DRILL ADAPTER	MODEL	PART #	CORING BIT KIT MODEL / PART #		GUIDE SLEEVE PART #	BLADE MODEL / PART #		LENGTH	WEIGHT
320 (7 mm)	Standard "T"	Built-In 3/8" (9.5 mm)	QRT 320	35142	CB 164K	35148	35144				
	Ratchet "T"	Separate 3/8" (9.5 mm)	QRT 320-R	35145							
500	Standard "T"	Built-In 3/8" (9.5 mm)	QRT 500	34640	CB 130K	33378	33404				
	Ratchet "T"	Separate 3/8" (9.5 mm)	QRT 500-R	33505							
540	Standard "T"	Built-In 3/8" (9.5 mm)	QRT 540	34641	CB 143K	33668	33787	CB 60 14907		2.63" (67 mm)	6 oz (170 g)
	Ratchet "T"	Separate 3/8" (9.5 mm)	QRT 540-R	33508							
715	Standard "T"	Built-In 3/8" (9.5 mm)	QRT 715	34660	CB 159K	34664	34663				
	Ratchet "T"	Separate 3/8" (9.5 mm)	QRT 715-R	34665							
860	Standard "T"	Built-In 3/8" (9.5 mm)	QRT 860	34642	CB 127K	33376	33371				
	Ratchet "T"	Separate 3/8" (9.5 mm)	QRT 860-R	33510							
1125	Standard "T"	Built-In 3/8" (9.5 mm)	QRT 1125	34643	CB 145K	33678	No Sleeve Required				
	Ratchet "T"	Separate 3/8" (9.5 mm)	QRT 1125-R	33512							

Coring & Stripping

JCST-QR Series

Coaxial Coring & Stripping Tool



- Designed to simultaneously strip the jacket, core the dielectric, strip the aluminum sheath & trim the conductor to the proper length in one quick operation
- Replaceable heat-treated sheath cutting blade produces a smooth, beveled edge
- Standard models feature a "T" handle with a built-in 3/8" drill adapter & ratchet models feature a ratchet "T" handle with a separate 3/8" drill adapter for manual or drill operations
- Durable, all-metal construction

CABLE SIZE	HANDLE	DRILL ADAPTER	MODEL	PART #	CORING BIT KIT MODEL / PART #		JACKET BLADE MODEL / PART #		SHEATH BLADE MODEL / PART #		LENGTH	WEIGHT
320 (7 mm)	Standard "T"	Built-In 3/8" (9.5 mm)	JCST 7MMQR	36515	CB 164K	35148	6667H	19212	CB 60	14902	7.5" (190.5 mm)	1 lb 8 oz (675 g)
	Ratchet "T"	Separate 3/8" (9.5 mm)	JCST 7MMQR-R	36517								
540	Standard "T"	Built-In 3/8" (9.5 mm)	JCST 540QR	36520	CB 143K	33668						
	Ratchet "T"	Separate 3/8" (9.5 mm)	JCST 540QR-R	36523								
715	Standard "T"	Built-In 3/8" (9.5 mm)	JCST 715QR	36525	CB 159K	34664						
	Ratchet "T"	Separate 3/8" (9.5 mm)	JCST 715QR-R	36528								
860	Standard "T"	Built-In 3/8" (9.5 mm)	JCST 860QR	36530	CB 127K	33376						
	Ratchet "T"	Separate 3/8" (9.5 mm)	JCST 860QR-R	36533								

Custom JCST-QR Guide

CONNECTOR MANUFACTURER	CABLE SIZE	MODEL	PART #	CORING BIT KIT MODEL / PART #		JACKET BLADE MODEL / PART #		SHEATH BLADE MODEL / PART #		LENGTH	WEIGHT
Commscope® (Trilogy)*	500	JCST 05TI	35103	CB 132K	33752	6667H	19212	CB 60	14902	7.5" (190.5 mm)	1 lb 8 oz (675 g)
	700	JCST 97TI	35109	CB 134K	33762						

CST MC Series

CommScope® MC² Cable Coring, Stripping & Chamfering Tool



- Combination tool quickly strips the sheath & cores the dielectric on Commscope® (Trilogy) MC² cables in one precise operation
- Durable, all-metal construction with white guide sleeves & double helix coring bit designed for fast & accurate operations on polyethylene disc/air dielectric cable
- Standard models feature a "T" handle with a built-in 3/8" drill adapter & ratchet models feature a ratchet "T" handle with a separate 3/8" drill adapter for manual or drill operations
- Replaceable heat-treated sheath cutting blade produces a smooth, beveled edge

CABLE MANUFACTURER / TYPE		CABLE SIZE	"T" HANDLE	MODEL	PART #	CORING BIT KIT MODEL / PART #		GUIDE SLEEVE COLOR / PART #	BLADE MODEL / PART #		LENGTH	WEIGHT
CommScope® (Trilogy) MC ² Cables	500	Standard	CST 500MC	33895	CB 132K	33752	White	33771-2	CB 60	14907	8.38" (213 mm)	1 lb (454 g)
		Ratchet	CST 500MC-R	33796								
	650	Standard	CST 650MC	33900	CB 133K	33757	White	33771-3				
		Ratchet	CST 650MC-R	33797								
	750	Standard	CST 750MC	33905	CB 134K	33762	White	33771-4				
		Ratchet	CST 750MC-R	33798								

CST 320/7C Series

CommScope® QR Cable Coring, Stripping & Chamfering Tool



- Designed to strip the jacket & core the dielectric on MDU 320 Commscope® Quantum Reach (QR) cables
- U.S. Patent No. D515,901S
- Durable, all-metal construction, as well as heat-treated coring bits & easily replaced sheath cutting blades ensure longevity

CABLE COMPATIBILITY		CONNECTOR COMPATIBILITY		MODEL	PART #	CORING BIT KIT MODEL / PART #	REPLACEMENT BLADE MODEL / PART #	CONDUCTOR CLEANING KIT MODEL / PART #	LENGTH	WEIGHT
MANUFACTURER	TYPE	MANUFACTURER	TYPE							
CommScope®	MDU 320 Quantum Reach (QR)	Corning Gilbert	UltraSeal® QR	CST 320/7C	36760	CB 216 36762	CB 60 14907	CC-320QRF 36766	5" (127 mm)	8 oz (227 g)
			GAF-360-320							
		PCT	DRS 320 QR							
		PPC	EX320 QR							
		Belden	Snap-N-Seal®							

Coring & Stripping

CST Series

Coring, Stripping & Chamfering Tool

- Combination tool quickly strips the sheath & cores the dielectric on cables in one precise operation with its replaceable heat-treated sheath cutting blade to produce a smooth, beveled edge
- Durable, all-metal construction with color-coded guide sleeves provide easy identification
- Standard models feature a "T" handle with a built-in 3/8" drill adapter & ratchet models feature a ratchet "T" handle with a separate 3/8" drill adapter for manual or drill operations
- Strip stops are available for strip lengths from 0.5" to 2" (12.7 to 50.8 mm)



CABLE SIZE	CABLE COMPATIBILITY						"T" HANDLE	MODEL	PART #	CORING BIT KIT MODEL / PART #	GUIDE SLEEVE COLOR / PART #	BLADE MODEL / PART #	LENGTH	WEIGHT
	COMMSCOPE® P3	POWER-FEEDER™	TX	TIMES FIBER		ALCATEL BENELUX / ACE/ACW								
412	•			•		•	Standard	CST 412	31810	CB 114K 31220	Black 29104			
							Ratchet	CST 412-R	31850					
500	•			•		•	Standard	CST 500	31910	CB 115K 31320	Red 29105			
							Ratchet	CST 500-R	31950					
565	•		•			•	Standard	CST 565TX	31985	CB 146K 31325	Red 29108			
							Ratchet	CST 565TX-R	31990					
625	•			•		•	Standard	CST 625	32010	CB 116K 31420				
							Ratchet	CST 625-R	32050					
625/PF		•			•		Standard	CST 625PF	36058	CB 201K 36057	Blue 29106	CB 60 14907		
							Ratchet	CST 625PF-R	36055					
625/20					•		Standard	CST 625/20	36095	CB 203K 36097				
							Ratchet	CST 625/20-R	36098					
625/50					•		Standard	CST 625/50	35945	CB 200K 35947				
							Ratchet	CST 625/50-R	35944					
700	•		•			•	Standard	CST 700TX	33863	CB 137K 33858	Black 33847			
							Ratchet	CST 700TX-R	33855					
750	•			•		•	Standard	CST 750	32110	CB 117K 31520	Green 29111			
							Ratchet	CST 750-R	32150					
840	•		•			•	Standard	CST 840TX	32180	CB 138K 31531	Green 29109			
							Ratchet	CST 840TX-R	32185					
875	•			•		•	Standard	CST 875	32210	CB 118K 31620	Yellow 29112	CB 60 14907		
							Ratchet	CST 875-R	32250					
1000	•			•		•	Standard	CST 21000	32320	CB 119K 31720	Orange 29113			
							Ratchet	CST 21000-R	32330					
1160	•		•			•	Standard	CST 21160TX	32380	CB 158K 32385	Silver 33837	CB 26 14403		
							Ratchet	CST 21160TX-R	32390					

*CST 625PF model is compatible with Commscope® PowerFeeder & Times Fiber T10 Power 22 ohm cables.

CST Series Strip Stops

STRIP LENGTH	PART #	STRIP LENGTH	PART #	STRIP LENGTH	PART #	STRIP LENGTH	PART #	STRIP LENGTH	PART #
1/2" (12.70 mm)	32974	7/8" (2.22 mm)	32977	1 1/8" (28.58 mm)	32973	1 7/16" (36.51 mm)	32957	2" (50.80 mm)	33962
5/8" (15.88 mm)	32975	1 5/16" (23.81 mm)	32978	1 3/16" (30.16 mm)	32986	1 1/2" (38.10 mm)	32982		
3/4" (19.05 mm)	32985	1" (25.40 mm)	32980	1 1/4" (31.75 mm)	32983	1 9/16" (39.69 mm)	33959		
13/16" (20.64 mm)	33958	1 1/16" (26.99 mm)	32979	1 3/8" (34.93 mm)	32981	1 3/4" (44.45 mm)	33967		

CST LMR

LMR Coax Cable Coring, Stripping & Chamfering Tool

- Two-step combination tool quickly prepares various standard Times Microwave LMR coax cables for crimp (EZ) & clamp-type (C) connectors
- Models are available with a built-in deburring tool

Please contact Times Microwave Systems directly at (800) 867-2629 or sales@timesmicro.com for authorized distributors of this tool.



CABLE MANUFACTURER	CABLE TYPE	CABLE SIZE	MODEL	BUILT-IN DEBURR	REPLACEMENT BLADE SET	LENGTH	WEIGHT
Times Microwave	LMR Coax Cables	195/200	CST 195/200 LMR	•	14907*	4" (101.6 mm)	3.5 oz (99 g)
		240	CST 240 LMR				
		300	CST 300 LMR				
		400	CST 400 LMR				
		500	CST 500 LMR				
		600	CST 600 LMR				

*Set of 5 blades.

Stripping & Chamfering

Smart-Strip Series



Data Cable Jacket Stripper

- Versatile & compact tool accurately strips all types of standard insulation on UTP & STP data network cables, as well as delicate & shielded multi-core cables
- Spring-loaded action & cutting depth adjustment provides precise cutting depths from 0.03" to 0.039" (0.75 to 10 mm) on standard insulated wire & cables



MODEL	PART #	CABLE COMPATIBILITY	STRIPPING DEPTH	STRIPPING MATERIAL	LENGTH	WEIGHT
Smart-Strip	39470	UTP & STP Data Network; Shielded Multi-Core	0.03" - 0.39" (0.75 - 10 mm)	Standard Insulation	3.8" (97 mm)	1.4 oz (40 g)

JST Series



Coaxial Cable Jacket Stripper

- Fast & efficient stripping tool for removing jackets from trunk & distribution coaxial cables with a knurled body to provide a sturdy grip with greater leverage
- Color-coded & easily identifiable anodized bodies match coring & stripping tool sleeves while factory-set blades reduce scoring or nicking of the aluminum sheath



CABLE SIZE	CABLE COMPATIBILITY												MODEL	PART #	COLOR	BLADE MODEL / PART #	LENGTH	WEIGHT	
	COMMSCOPE®						TIMES FIBER												ALCATEL / BENELUX ACE
	P3	P1/P2	P3/JCASP	P3 THICK	QR*	CABLE GUARD	MC	T10	TX	T4	T10/BF	T10 THICK							
Standard Models	412	•						•						JST 412	11900	Black	CB 6667H 19212	2.63" (67 mm)	6 oz (170 g)
	500	•						•						JST 500	12500	Red			
							•							JST 500MC	33780	-			
	565	•							•					JST 565	32400	Red			
	625	•							•					JST 625	28900	Blue			
	650						•							JST 650MC	33820	-			
	700	•								•				JST 700	33865	Black			
	750	•							•					JST 750	12600	Green			
							•							JST 750MC	33790	-			
	840	•								•				JST 840	33870	Green			
	875	•							•					JST 875	21500	Yellow			
1000	•							•					JST 1000	21000	Orange				
1160	•								•				JST 1160	33875	Silver				
Custom Models	412		•										•	JST 412X	37850	-	CB 6667H 19212	2.63" (67 mm)	6 oz (170 g)
													•	JST 412 TFCJBX	36100-108	-			
													•	JST 500X	37855	-			
	500												•	JST 500CG	34175	-			
													•	JST 500 TFCJBX	36100-109	-			
													•	JST 10-60040	35137	-			
	540												•	JST 540 QR	33955	-			
													•	JST 565CG	37805	-			
	565												•	JST 565 TXJBX	36100-110	-			
													•	JST 625X	37860	-			
													•	JST 625CG	34180	-			
	625												•	JST 625 TFCJBX	36100-111	-			
													•	JST 10-72540	35135	-			
	700												•	JST 700CG	37810	-			
													•	JST 700 TXJBX	36100-112	-			
	715												•	JST 715 QR	34670	-			
													•	JST 750X	37865	-			
													•	JST 750CG	34185	-			
	750												•	JST 750 TFCJBX	36100-113	-			
													•	JST 11-85040	35136	-			
	840												•	JST 840 TXJBX	36100-114	-			
860												•	JST 860 QR	33385	-				
												•	JST 875X	37870	-				
												•	JST 875CG	34805	-				
875												•	JST 875 TFJBX	36100-115	-				
												•	JST 1000X	37875	-				
1000												•	JST 1000 TFCJBX	36100-116	-				
1160												•	JST 1160 TXJBX	12300-029	-				

*For more QR & QR Dual Jacket Cable models, visit our website.

Stripping & Chamfering

SLT Series

Adjustable Broadband Cable Stripping & Chamfering Tool

- Rugged, all-metal precision two-step preparation tool exposes the center conductor from 10 to 20 mm & the braid from 10 to 25 mm on Slimline, F, FB & 2.2/9.3 FPE cables
- Adjustable strip stop covers a wide range of compatible conductors
- Convenient built-in center conductor strip stop



Ø OVER JACKET (DOJ)	Ø OVER DIELECTRIC (DOD)	INNER CORD (IC)	CABLE MANUFACTURER	CABLE TYPE	MODEL	PART #	COLOR	LENGTH	WEIGHT
10.5 mm	7.0 mm	1.7 mm	CommScope®	Coax 6 CL (1.7/7.0/10.5)	SLT 10.5	38405	Yellow	8.625" (219 mm)	1 lb 13 oz (817 g)
			TKF / AEG	Coax 6 Bamboo (1.6/7.2/10.5)					
			Draka	Coax 6 CT15A, CT16S, CT17S					
11.0 mm	7.3 mm	1.7 mm	Bede a.o.	1 iKx (1.1/7.3/11.0)	SLT 11	38610	Purple		
			11.3 mm	7.6 mm					
12.3 mm	8.8 mm	2.2 mm	CommScope®	1 nKx Bamboo (2.2/8.8/12.5)	SLT 12.5	37280	Red		
			Draka	A-2YOK2Y 1x(2.2/8.8)KxLg					
				Coax 4 CT 22S (2.2/8.8/12.3)					
12.5 mm	8.8 mm	2.2 mm	Draka	Coax 4 CT 22A (2.2/8.8/12.3)	SLT 12.5	37280	Red		
				Coax 4 CT 22A (2.2/9.3/12.5)					
			Coax 4 CT 22E (2.2/9.3/12.5)						
			AEG	AEG 2.2/8.8/12.5					
			Bede a.o.	1 nKx Bamboo (2.2/8.8/12.5)					
13.6 mm	10.2 mm	2.2 mm	CommScope®	HF-75TS	SLT 14.5	42550	Bronze		
			Draka	Coax 4 CT22A (2.2/10.2/13.6)					
13.8 mm	10.2 mm	2.2 mm	Beta Cavi	Coax 4 (2.2/10.2/13.6)	SLT 14	37275	Silver		
			Belden/CDT	Coax 4 FB14 (2.2/10.2/13.8)					
14.3 mm	10.9 mm	2.7 mm	Eupen	7118 (Corrugated Copper)	SLT 16.5	43215	Green		
14.5 mm	10.9 mm	2.7 mm	CommScope®	CA 514					
16.5 mm	13.1 mm	2.5 mm	NK Cables	Tellu 5	SLT 17	38365	Blue		
17.0 mm	13.5 mm	3.3 mm	CommScope®	1qKx (Bamboo 3.3/13.5/17.0)					
			Draka/Bede a.o.	1(q)Kx (Bamboo 3.3/13.5/17.0)					
17.1 mm	13.5 mm	3.3 mm	Bede a.o.	A-2YOK2Y 1x(3.3/13.5) KxLg	SLT 17.7	38400	Orange		
			CommScope®	A-2YOK2Y 1x(3.3/13.5) KxLg					
			Draka	Coax 3 CT 33A (3.3/13.5/17.1)					
17.5 mm	13.5 mm	3.3 mm	Draka	Coax 3 CT 33S (3.3/13.3/17.1)	SLT 17.7	38400	Orange		
			TKF / AEG	Coax 3 Bamboo					
17.7 mm	13.5 mm	3.3 mm	Bede a.o.	Tellas 3.3/13.5 /17.5	SLT 17.7	38400	Orange		
			CommScope®	Coax 3 CL 3.3/13.5/17.7					
19.3 mm	14.5 mm	3.5 mm	Draka	Coax 3 CT 33A (3.45/14.9/19.3)	SLT 20	37270	Black		
	14.9 mm	3.5 mm	Draka	Coax 3 CT 33E (3.45/14.9/19.3)					
19.8 mm	14.9 mm	3.4 mm	Cavel	Coax 3 34/145	SLT 20	37270	Black		
			Belden/CDT	Coax 3 FB20 (3.4/14.9/19.8)					
				Coax 3 F20 (3.4/14.9/19.8)					
21.6 mm	16.5 mm	3.4 mm	Beta Cavi	Coax 3 34/145 (3.4/14.5/19.8)	SLT 21	38605	Bronze		
23.1 mm	19.1 mm	4.2 mm	Belden/CDT	Coax 3 FB21 (3.4/16.5/21.6)	SLT 21	38605	Bronze		
16.0 mm	12.4 mm	3.1 mm	NK Cables	Tellu 3	SLT 23	43210	Lt. Blue		
			Eupen	7128 (Corrugated Copper)	SLT 12-75	42620	Lt. Blue		
CommScope®	CA 516								
11.5 mm	8.3 mm	2.0 mm	Eupen	7088, 7082, 7081 (Corrugated)	SLT 38-75	42445	Purple		
			CommScope®	CA 511 J					
19.8 mm	16.0 mm	3.9 mm	Eupen	7168, 7162 (Corrugated)	SLT 58-75	42245	Lt. Gray		
20.1 mm	15.6 mm	3.9 mm	CommScope®	CA 519					

SLT Series Accessories Guide

ACCESSORY DESCRIPTION	PART #
Ringin Knife Assembly	11001
CB35 Replacement Blade	11013

ACCESSORY DESCRIPTION	PART #
CB35 Replacement Blade (Pack of 10)	11002
CB6667H Replacement Blade	19212

ACCESSORY DESCRIPTION	PART #
Chamfer Strip Stop (SLT 10.5/SLT 11/SLT 38-75 Only)	42010
SLT Chamfer Strip Stop	42015

Stripping & Chamfering


MSES-50 Series

Wireless 50 Ohm Cable Mid-Span & End Stripper



- Self-feeding tool is designed to efficiently strip the jackets on the mid-span & end of wireless 50 ohm coaxial cable to any length without damaging the conductor
- Suitable for cable diameters from 1/2" to 1.7" (12.7 to 43.18 mm)
- Features a spring-loaded locking bolt that opens the tool in half for quick & easy cable positioning
- Equipped with a convenient pull ring that easily attaches to tool belts & pouches for quick access

50 OHM CABLE TYPE	CABLE SIZE	MODEL	PART #	REPLACEMENT BLADES MODEL / PART #		BODY COLOR	LENGTH	WEIGHT
Andrew / Eupen / NK / RFS	1/2" (12.70 mm)	MSES-12-50	36812	CB 223	37111	Blue	4.3" (109 mm)	12.5 oz (354 g)
	7/8" (22.23 mm)	MSES-78-50	36809	CB 222	37107	Copper		
	1 1/4" (31.75 mm)	MSES-114-50	36806	CB 217	36795	Gold		
Times Microwave LMR®	0.4" (10.16 mm)	MSES-GST-400A	Please contact Times Microwave Systems at (800) 867-2629 or sales@timesmicro.com for more information.					
	0.6" (15.24 mm)	MSES-GST-600						
	0.9" (22.86 mm)	MSES-GST-900						
	1.2" (30.48 mm)	MSES-GST-1200						
1.7" (43.18 mm)	MSES-GST-1700							



AJST Series Armored Cable Jacket Stripper




- Designed for the removal of the outer jacket & armor layer on CommScope® P3 JACASS & QR JACASS underground construction trunk & distribution cables
- Factory-set blade requires no adjustment
- Rugged, color-coded anodized aluminum design provides easy identification
- Elongated handle increases the stripping leverage & protects hands against armor chips

CABLE SIZE	CABLE MANUFACTURER & TYPE		MODEL	PART #	COLOR	BLADE MODEL / PART #	DRILL ADAPTER PART #	LENGTH	WEIGHT
	COMMScope® P3	COMMScope® QR							
500	•		AJST 500/P3	36223	Red	CB 213 36467	12350	6.25" (159 mm)	11 oz (312 g)
540		•	AJST 540QR	36233	Copper				
625	•		AJST 625/P3	36225	Blue				
715		•	AJST 715QR	36235	Copper				
750	•		AJST 750/P3	36227	Green				
860		•	AJST 860QR	36237	Copper				
875	•		AJST 875/P3	36229	Orange				

TXFF & TXFF-Q Series

MegaDrop Cable Stripper

- Color-coded tool exposes the center conductor & removes the jacket on Times Fiber Communications MegaDrop TX-10-15 Low Loss Drop Cable and F50 CommScope® cable
- The first cut prepares the cable to the proper center conductor length & the second cut will remove the proper length of outer jacket to expose the braid

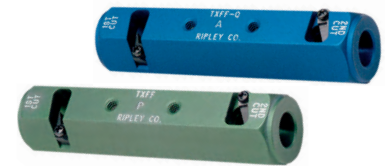

MODEL	PART #	COLOR	DROP CABLE SHIELD		CONNECTOR MANUFACTURER			1ST CUT BLADE MODEL / PART #		2ND CUT BLADE MODEL / PART #		LENGTH	WEIGHT
			STD. / TRI	QUAD	CORNING CABELCON	AMPHENOL / CORNING GILBERT	PPC / PCT						
TXFF-C	36635	Green	•		•			CB 26 14403	CB 60 14907	5.375" (137 mm)	1 lb 12 oz (795 g)		
TXFF-QC	36634	Blue		•	•								
TXFF-A/G	36637	Green	•			•							
TXFF-QA/G	36636	Blue		•		•							
TXFF-P	36639	Green	•				•						
TXFF-QP	36638	Blue		•			•						

Drop Trimmers



SDT Series Single Drop Cable Trimmer

- Color-coded one-step preparation tool exposes the drop cable center conductor by 5/16" (7.6 mm) & removes 1/4" (6.35 mm) of jacket
- Unique cassette ejector design provides a quick replacement of easily identifiable, color-coded blade cassettes & high quality steel blades will perform 3500+ preparations under normal use
- Durable, impact resistant & lightweight polymer replacement of easily identifiable, color-coded blade cassettes & high quality steel blades will perform 3500+ preparations under normal use
- Includes one installed blade cassette & one additional blade cassette
- U.S. Patent Nos. 6,128,976 & 6,253,641

MODEL	PART #	DROP CABLE SERIES					SPECIALTY CABLE			BUILT-IN STRIP STOP	BUILT-IN DEBURR TOOL	REPLACEMENT BLADE CASSETTES*			LENGTH	WEIGHT
		59/6	7	9	11	N48	TX-10-15	F50	50 OHM TYPE			MODEL	COLOR	PART #		
SDT 596-250	36700	•				•				No	-	RC 596-250	Red	35241	4.6" (119 mm)	1.6 oz (45 g)
SDT 596-250SS	36700-1	•				•			Yes	-	RC 596-250	Red	35241			
SDT 7-250	36701		•						No	-	RC 7-250	Green	35242			
SDT 11-250	36702				•				No	-	RC 11-250	Black	35243			
SDT Coax 9	36733			•					No	-	RC 9-250	Green	36739			
SDT EUR	42006	•		•		•			No	-	RC EURO-250	Orange	42004			
SDT-TXFF-250	37460						•	•	No	-	Blade Not Replaceable					
SDT 240-50	38651							240	-	No	RC 240-50	N/A	38661			
SDT 300-50	38652							300	-	No	RC 300-50	N/A	38662			
SDT 400-50	38653							400	-	Yes	RC 400-50	N/A	38663			
SDT 500-50	38654							500	-	Yes	RC 500-50	N/A	38664			
SDT 600-50	38655							600	-	Yes	RC 600-50	N/A	38665			

*Replacement blade cassettes are sold in packs of 2.

LDT & LDT MINI Series Lightweight Single Drop Cable Trimmer

- One-step lightweight preparation tool exposes the drop cable center conductor by 5/16" (7.6 mm) & removes 1/4" (6.35 mm) of jacket
- Unique cassette ejector provides quick replacement of easily identifiable, color-coded blade cassettes
- Includes one installed blade cassette
- Ergonomic & compact tool designed for easy handling, as well as constructed from durable, impact resistant & lightweight polymer
- High quality steel blades will perform 3500+ preparations under normal use
- No adjustments or additional tools required



MODEL	PART #	DROP CABLE SERIES						REPLACEMENT BLADE CASSETTES*			REPLACEMENT BRUSHES MODEL / PART #	LENGTH	WEIGHT
		59/6	N48	7	9	6 PLENUM	CAT 5/5E/6	MODEL	COLOR	PART #			
LDT596-250	38830	•	•					RC 596-250	Red	35241	RBB (Set of 5) 42679	4" (102 mm)	0.8 oz (23 g)
LDT EUR	42009	•	•					RC EUR-250	Orange	42004			
LDT 6-PL	42313					•		RC 6PL-250	Blue	42315			
LDT-UTP	42688						•	RC-UTP	Yellow	42687			

LDT Series MINI Guide

MODEL	PART #	DROP CABLE SERIES			REPLACEMENT BLADE CASSETTES*			REPLACEMENT BRUSHES MODEL / PART #
		N35	MINI 22-24 AWG	MINI 24-26 AWG	MODEL	COLOR	PART #	
LDT MINI	38833	•	•		RC MINI-250	White	38587	RBB (Set of 5) 42679
LDT MINI-125	42590	•	•		RC MINI-1-250	Tan	42314	
LDT MINI-1	42310			•	RC MINI-250	White	38587	
LDT MINI NS	38985			•	RC MINI-1-250	Tan	42314	

*Replacement blade cassettes are sold in packs of 2.

Drop Trimmers



UDT Series Universal Cable Drop Trimmers

- Compact, one-step cable preparation tool for all 59, 6, N48, 7, coax 9 & 11 drop cable constructions
- Features interchangeable blades to expose the conductor 5/16" (7.93 mm) & remove the jacket 1/4" (6.35 mm), as well as storage for two additional blades within the tool body
- Blade cassettes are color-coded for easy identification
- Durable polymer construction & equipped with built-in strip stops
- U.S. Patent No. 5,716,132

MODEL	PART #	CABLE COMPATIBILITY						BLADE CASSETTE 1 MODEL / PART #		BLADE CASSETTE 2 MODEL / PART #		ADD. BLADE CASSETTE 1 MODEL / PART #		ADD. BLADE CASSETTE 2 MODEL / PART #		LENGTH	WEIGHT	
		59	6	7	9	11	11Q	N48										
UDT59611-250	35220	•	•			•	•		RC596-250	35241	RC11-250	35243	RC596-250	35241			5.5" (139.7 mm)	4.5 oz (127 g)
UDT596711-250	35221	•	•	•		•	•		RC596-250	35241	RC11-250	35243	RC7-250	35242	RC11Q-250	35244		
UDT711-250	35238			•		•	•		RC7-250	35242	RC11-250	35243	RC7-250	35242				
UDT-EUR11-250	36194		•		•			•	RC-EUR-250	42004	RC11-250	35243	RC-EUR-250	42004	RC11-250	35243		

UDT Replacement Blade Guide

MODEL*	PART #	CABLE COMPATIBILITY						CASSETTE COLOR	CONDUCTOR EXPOSURE LENGTH	JACKET REMOVAL LENGTH
		59	6	7	9	11	11Q			
RC596-250	35241	•	•					Red	0.3125" (7.93 mm)	0.25" (6.35 mm)
RC7-250	35242			•				Green		
RC11-250	35243					•		Black		
RC11Q-250	35244						•	Gray		
RC-EUR-250	42004		•		•		•	Orange		

*Replacement blade cassettes are sold in packs of 2.

DDT & DDT MINI Series Dual Drop Cable Trimmer

- Combination tool allows cable preparation of 59, 6, 7, 9, N48 & 11 coax cable (std, tri & quad) without the need to change out color-coded blade cassette
- DDT-UTP model prepares CAT5, CAT5E, CAT6 & larger 10G UTP/STP type cables in one combination tool
- US Patent No. 5,713,132
- Built-in polymer braid brush & strip stop
- Superior quality tool steel blade cassettes will perform 3500+ preparations under normal use
- One-step preparation exposes center conductor by 5/16" (7.6 mm) & removes 1/4" (6.35 mm) of jacket



MODEL	PART #	DROP CABLE SERIES						REPLACEMENT BLADE CASSETTES*			REPLACEMENT BRUSHES MODEL / PART #	LENGTH	WEIGHT		
		59/6	N48	7	9	11	CAT 5/SE/6	CAT 10G	MODEL	COLOR				PART #	
DDT-596/7	42185	•	•						RC 596-250	Red	35241	RBB (Set of 5)	42679	3.63" (92.2 mm)	2 oz (57 g)
				•					RC7	Green	35242				
DDT-596/11	38590	•	•						RC 596-250	Red	35241				
						•			RC 11-250	Black	35243				
DDT-EUR/11	42012	•	•		•	•		RC EUR-250	Orange	42004					
DDT-UTP	42452						•		RC-UTP	Yellow	42687				
								•	RC-UTP-10	Green	42768				

DDT MINI Series Guide

MODEL	PART #	DROP CABLE SERIES						REPLACEMENT BLADE CASSETTES*			REPLACEMENT BRUSHES	
		59/6	N35	N48	9	MINI 22-24 AWG	MINI 24-26 AWG	MODEL	COLOR	PART #	MODEL	PART #
DDT-596/MINI	38591	•	•	•				RC MINI-250	White	38587	RBB (Set of 5)	42679
DDT-596/MINI-1	42311	•	•					RC MINI-1-250	Tan	42314		
DDT-EUR/MINI	42018	•	•	•	•			RC MINI-250	White	38587		
DDT-EUR/MINI-1	42327	•	•	•	•			RC MINI-1-250	Tan	42314		

*Replacement blade cassettes are sold in packs of 2.

Coax Cable Cutters



CXC Series

Aluminum Trunk & Distribution Coax Cable Cutter



- Cuts efficiently through aluminum trunk & distribution coaxial cables without cable distortion
- Lightweight, compact & easy to use; **NOT suitable to cut steel conductors**

MODEL	PART #	MAX. CABLE O.D.	LENGTH	WEIGHT
CXC	35325	0.75" (19 mm)	8" (203 mm)	15 oz (425 g)
CXC-1	35975	1" (25.4 mm)		



CCS Series

Copper-Clad Steel Conductor Coax Cable Cutter



- Ideal for cutting 59, 6, 7 & 11 series coax cables, as well as N48, 5C & 9 coax cables
- Designed to efficiently cut through copper-clad steel conductors
- Equipped with rounded jaws for optimum cutting while maintaining the original curvature of cable

MODEL	PART #	MAX. CABLE O.D.	LENGTH	WEIGHT
CCS-22	39930	0.4" (10.16 mm)	6.375" (162 mm)	6 oz (170 g)



CCP Series

Industrial Coax Cable Cutter



- Unique cradle design in handle provides squared, burr-free cuts through PVC/poly pipe, coax (braided, smooth or corrugated), conduit, inner-duct, tubing & hose
- Features a scissor-type spring action & ergonomic polymer handles to reduce hand strain

MODEL	PART #	MAX. CABLE O.D.	BLADE PART #	LENGTH	WEIGHT
CCP	42940	1.25" (37.5 mm)	42941	8" (203 mm)	4 oz (113 g)



CC22 & CC38

Cable Stripper & Cutter



- Designed to cut & strip stranded or solid conductors comprised of copper or aluminum, minimizing the flattening of the cable end & center conductor
- Precise, high-quality carbon steel construction & durable, non-slip handles

MODEL	PART #	CUT MAX. CABLE O.D.	STRIP MAX. CABLE O.D.	LENGTH	WEIGHT
CC22	39430	0.35" (8.9 mm)	0.23" (5.8 mm)	6.375" (162 mm)	6 oz (170 g)
		1 AWG	4 AWG		
CC38	39431	0.43" (10.9 mm)	0.29" (7.4 mm)	8.25" (210 mm)	10.4 oz (296 g)
		2/0 AWG	2 AWG		

Specialty Cutters

HSK Series

Antenna Hole Saw Kit



- Designed for use with 3/8" (9.5 mm) or larger electric drills during the installation of permanently mounted mobile antennas
- Equipped with a ribbed outer edge to score paint for improved grounding

- Special drill bit prevents the saw from walking
- 0.125" (3.18 mm) limited hole depth prevents damage caused to underlying headliners of vehicles



MODEL	PART #	HOLE DIAMETER(S)	MAX. HOLE DEPTH	REPLACEMENT BLADES (SET OF 2) MODEL / PART #	LENGTH	WEIGHT
HSK-1	26000	3/4" (19.05 mm) & 1-5/16" (33.3 mm)	0.125" (3.18 mm)	Refer to Next 2 Rows for Blade Sizes		2.5" (64 mm)
HSK-19	26016	3/4" (19.05 mm)	0.125" (3.18 mm)	SB-89	26029	
HSK-33	26022	1-5/16" (33.3 mm)	0.125" (3.18 mm)	SB-88	26030	

Messengered Web & Drop Cable Slitters

MWS Series Messengered Web Slitter



- Ideal cable messenger web slitting tool for various applications such as pole clamping or dead-end attachment
- Factory-set blade is easily replaced & no adjustment necessary
- Refer to MWSS Series for the additional shaving capability

MWSS Series Messengered Web Slitter & Shaver



- Spring-loaded blade shield design secures the blade to the tray & ensures safety during use
- Ideal combination tool effectively slits messengered web & shaves the residual web material from the cable jacket for proper cable prep
- Adjustable shaving blade while slitting blade is fixed & factory-set
- U.S. Patent No. 6,427,331

MODEL	PART #	COMMSCOPE® QR	COMMSCOPE® P3 JCAM	TIMES FIBER T10 MS	TIMES FIBER TX MS	SHAVING BLADE MODEL / PART #		SLITTING BLADE MODEL / PART #		LENGTH	WEIGHT
MWS 400	37049	320	412	412	-	N/A				3.8" (96 mm)	6.7 oz (191 g)
MWS 500	37037	500 / 540	500	500	565						
MWS 700	37030	715	625 / 750	625 / 750	700						
MWSS 400	37045	320	412	415	-	CB 229	37048	CB 209	36343	3.8" (96 mm)	6.7 oz (191 g)
MWSS 500	37033	500 / 540	500 / 565	500	565	CB 227	37036				
MWSS 700	37023	715	625 / 700 / 750	625 / 750	700	CB 226	37027				
MWSS 800	37039	860	840 / 875	875	840	CB 228	37042				



DCS Series Coax Drop Cable Slitter



- Lightweight & compact tool designed to slit the web on 59/6, 7 & 11 series messengered coaxial & dual coax drop cables, as well as shave the residual web material from cable jackets
- U.S. Patent No. 6,131,289
- High-visibility red body is equipped with built-in saddle & spring-loaded jaws to easily position the cable, as well as a shaving blade to remove residual ridge material for quick connectorization

MODEL	PART #	CABLE COMPATIBILITY	JACKET COMPATIBILITY	SLITTING BLADE MODEL / PART #		SHAVING BLADE MODEL / PART #		LENGTH	WEIGHT
DCS	36340	59/6, 7 & 11 Messengered / Dual Cables	PVC / Polyethylene	CB 209	36343	CB 283	36349	2.75" (70 mm)	5 oz (140 g)



Compression Tools



C.A.T. / C.A.T. AS / C.A.T. Multimedia Series

Connector Compression Tools



- Spring-loaded split jaw design allows for easy change out of connectors from most connector manufacturers
- Durable cast aluminum body with clear visibility of the connector compression operation
- Simple tool calibration with supplied gauge block (*Not applicable to the FX models*)
- U.S. Patent Nos.: 5,934,137; 5,647,119 & 6,820,326

MODEL	PART #	PLUNGER TIP	PLUNGER TIP COLOR	MATERIAL	CONNECTOR COMPATIBILITY	LENGTH	WEIGHT
Universal	36175-1	Interchangeable	Green	Black-Coated Cast Aluminum	Refer to Chart Below	7.0" (178 mm)	1.0 lb (454 g)
Universal FX	37260	Fixed / Non-Adjustable					
EX	36173	Adjustable/Interchangeable					
IEC/RCA-FX	37765	Fixed / Non-Adjustable	N/A	Black-Coated Cast Aluminum	Two Jaw Sets for Added Versatility; Refer to Chart Below	7.4" (187 mm)	1.1 lb (500 g)
AS	37720	Adjustable/Interchangeable					
AS-FX	37835	Fixed / Non-Adjustable					
AS-EX	37780	Adjustable/Interchangeable					
AS-DIGICON	37785	Adjustable/Interchangeable					
AS-DIGICON-FX	37845	Fixed / Non-Adjustable					
AS-IEC/RCA-FX	37830	Fixed / Non-Adjustable					
Multimedia	38855	Fixed / Non-Adjustable	Black	Red-Coated Cast Aluminum	Refer to Chart Below	7.4" (187 mm)	1.1 lb (500 g)

C.A.T. / C.A.T. AS / C.A.T. Multimedia Series Plunger Compatibility Guide

TYPE	CONNECTOR MANUFACTURER	CONNECTOR NAME	C.A.T. SERIES				C.A.T. AS ALL SERIES						C.A.T. MULTIMEDIA
			UNIVERSAL	UNIVERSAL FX	EX	IEC/RCA-FX	AS	AS-FX	AS-EX	AS-DIGICON	AS-DIGICON-FX	AS-IEC/RCA-FX	
59/6	Arris-Digicon	DS & DT™	•	•		•	•	•		•	•	•	•
		DS RCA				•						•	•
	Belden	DS RCA MINI / DS BNC											•
		SNAP-N-SEAL®	•	•		•	•	•					•
	Corning Cabelcon	CX3	•	•		•	•			•	•	•	•
		CX3-IECF / CX3-IECM				•							•
	Corning Gilbert	EFC / F-UE / F-UE-M	•	•		•	•	•		•	•	•	•
		UltraRange®	•	•		•	•	•		•	•	•	•
		UltraShield®	•	•		•	•	•		•	•	•	•
		RCA-UE / RCA-UE-M				•							•
	F-Conn	BNC-UE / BNC-UEM											•
		FS	•	•		•	•	•		•	•	•	•
		FSC				•							•
	Holland	FSU / FS-RCA / FSC-BNC											•
		SLC	•	•		•	•	•		•	•	•	•
	PCT	DRS	•	•		•	•	•	•	•	•	•	•
		DRS-IEF / DRS-IECFM				•							•
	PPC	TRS			•								
		EX			•				•				
		EX XL	•	•		•	•	•		•	•	•	•
CMP		•	•		•	•	•		•	•	•	•	
CMP-MC								•					
TFC	CMP-RCA / CMP-IEC				•							•	
	QCII	•	•		•	•	•		•	•	•	•	
7	Arris-Digicon	DS & DT™				•	•		•	•	•	•	
	Belden	SNAP-N-SEAL®				•	•					•	
	Corning Gilbert	UltraSeal®				•	•					•	
	PPC	EX				•	•	•				•	
	PCT	TRS						•					
11	Arris-Digicon	DS & DT™							•	•		•	
	Belden	SNAP-N-SEAL®							•	•	•	•	
	Corning Cabelcon	CX3							•	•	•	•	
	Corning Gilbert	UltraRange® / UltraSeal® / UltraSeal® 320 QR								•	•	•	•
		URS-MH								•	•	•	•
	PCT	DRS / DRS-320QR							•	•	•	•	
PPC	EX / EX320QR							•	•	•	•		
TFC	QCII							•	•	•	•		

Compression Tools

C.A.T. AIO Series

All-in-One Connector
Compression Tools



- This all-in-one compression tool design allows for the assembly of 59/6, 7, 11 & MINI drop connectors from most connector manufacturers
- Easy tool calibration with supplied gauge block & star adjustment wheel on the handle
- Field-proven design based on original Cablematic® C.A.T. Series with durable cast aluminum body
- U.S. Patent Nos.: 5,934,137; 5,647,119 & 6,820,326
- Please visit www.ripley-tools.com to see the full selection of IPT plungers that are available*

MODEL	PART #	PLUNGER INCLUDED	LENGTH	WEIGHT
C.A.T. AIO (Tool Body Only)	38480	None*	7.4" (187 mm)	1.1 lb (0.5 kg)

C.A.T. AIO Kit

All-in-One Connector
Compression Kit



- The kit allows the user to pick & choose only the additional plunger tips that are required for their unique applications
- Field-proven design based on the original Cablematic® C.A.T. Series with durable cast aluminum body
- Easy tool calibration with supplied gauge block & star adjustment wheel on handle
- Plunger tip to connector compatibility chart is provided in the tool case for proper plunger selection
- Custom plunger selections available; please visit www.ripley-tools.com to see the full selection of IPT plungers that are available*

MODEL	PART #	PLUNGERS INCLUDED	LENGTH	WEIGHT
C.A.T. AIO Kit	38480-007	IPT 1A/1B; IPT 2A/2B*	11.5" (292 mm)	2.9 lb (1.3 kg)



AT Series

Compact Compression Tools



- Narrow design maneuvers in areas where space & cable length is limited, such as wall boxes
- Premium quality construction black oxide steel finish & lightweight body with polymer grips for comfort
- Interchangeable connectors increase versatility & low compression force handles for ease of use

MODEL	PART #	HANDLE COLOR	CONNECTOR COMPATIBILITY	MATERIAL	LENGTH	WEIGHT
ATX	43990-1	Green	Refer to Chart Below	Black Oxide Steel	8" (203.2 mm)	1 lb (454 g)
ATU	43990-2	Blue				
ATC	43990-3	Red				

AT Series Connector Compatibility Guide

COMPRESSION CONNECTOR	CONNECTOR TYPE	MANUFACTURER	CONNECTOR NAME	ATX MODEL	ATU MODEL	ATC MODEL
Universal (21 mm)	59/6 Series F	Arris Digicon	DS / DT / DSU		•	•
		Belden/PPC	EX-XL / EX-XLWS / CMP		•	•
		Belden/T&B	SNAP-N-SEAL®		•	•
		Corning Cabelcon	CX3		•	•
		Corning Gilbert	F-UE / F-UE-M / SFC / EFC		•	•
		F-Conn	FS / FSU		•	•
		Holland	SLC		•	•
		PCT	TRS XL		•	•
	59/6 Series RCA & IEC	Arris Digicon	DS-RCA / DS-RCA MINI		•	•
		Belden/PPC	CMP-RCA / CMP-IEC		•	•
		Corning Cabelcon	CX3-IEC-F / CX3-IEC-M		•	•
		Corning Gilbert	RCA-UE / RCA-UE-M		•	•
		F-Conn	FS-RCA		•	•
EX (18 mm)	59/6 Series F	Belden/PPC	EX / CMP-MC	•		•
RG7/RG11	7/11 Series F	Belden/PPC	EX	•	•	•
		Belden/T&B	SNAP-N-SEAL®	•	•	•
		Corning Cabelcon	CX3	•	•	•
		Corning Gilbert	UR / URS	•	•	•
		TFC	QCII	•	•	•

Crimping Tools



BTC Series

BT & RJ Connector Crimper



- Combination tool integrates a crimper, wire cutter & jack stripper into one tool body
- Compatible with British Telecom 630A/631A modular connectors & RJ11, RJ12 & RJ45 connectors
- Ratchet mechanism easily releases even during mid-cycle operations

MODEL	PART #	BLADE PART #	LENGTH	WEIGHT
BTC	40000	80757 (Set of 2)	7.75" (197 mm)	12 oz (340 g)



RJC Series

RJ Connector Crimper



- Combination tool integrates a crimper, wire cutter & jack stripper into one tool body
- Compatible with RJ22 & RJ45 modular RJ connectors (4P, 6P, 8P)
- Ratchet mechanism easily releases even during mid-cycle operations

MODEL	PART #	BLADE PART #	LENGTH	WEIGHT
RJC	80756	80757 (Set of 2)	7.75" (197 mm)	12 oz (340 g)



CT Series

LMR[®] Cable Connector Hex Crimpers



- Premium quality crimping tool for Times Microwave Systems LMR[®] cables & connectors
- Fixed hex jaws* are precision alloy steel, self-bottoming & will not over-crimp
- Rugged steel frame construction provides maximum strength & ensures tool longevity

MODEL	PART #	CABLE COMPATIBILITY	CONNECTOR COMPATIBILITY	LENGTH	WEIGHT
CT300/400	42465	LMR300	Crimp Style	9" (229 mm)	1 lb 9 oz (708 g)
		LMR400			
CT240/200/100	42650	LMR240	Crimp Style		
		LMR200			
		LMR100			

*Jaws cannot be replaced



CR Series

CATV, MATV & STV Cable Connector Hex Crimper



- Hex crimping tool for CATV, MATV & STV connectors with precision, self-bottoming alloy steel jaws
- Toggle action delivers correct crimping force & star wheel allows for compression adjustment
- Rugged steel frame with heat-treated pins for maximum durability & longevity

MODEL	PART #	HEX SIZE	CONTACT HEX	LENGTH	WEIGHT
CR 211CX	33315	0.475" (12.07 mm)	0.096" (2.43 mm)	9" (229 mm)	1 lb 9 oz (708 g)
CR 270/213	35463	0.270" / 0.213" (6.85 / 5.41 mm)	N/A		
CR 596B	33320	0.324" / 0.262" (8.23 / 6.65 mm)	N/A		
CR 596QL	33335	0.360" / 0.324" (9.14 / 8.23 mm)	N/A		
CR 41Q	33275	0.453" / 0.315" (11.15 / 8.00 mm)	N/A		
CR 611QL	34475	0.470" / 0.324" (11.94 / 8.23 mm)	N/A		
CR 470/410	35460	0.470" / 0.410" (11.94 / 10.41 mm)	N/A		
CR 611Q2	34485	0.475" / 0.324" (12.07 / 8.23 mm)	0.100" (2.54 mm)		
CR 611U	34930	0.475" / 0.360" (12.07 / 9.14 mm)	0.096" (2.43 mm)		

Connector Insertion & Extraction Tools



RT-F716N & RT-BNC Series

Connector Removal Tools

- Engineered for easy access to connectors in high-density locations such as cable racks
- Nut on bottom of the handle grip integrates with the 7/16" TW torque wrench for torquing applications

RT-F716N

Designed for compatibility with 7/16" "F" connectors

RT-BNC

Designed for compatibility with BNC connectors



MODEL	PART #	CONNECTOR COMPATIBILITY	LENGTH	WEIGHT
RT-F716N	38330	7/16" "F" Connectors	11.75" (298 mm)	3.4 oz (96 g)
RT-BNC	38355	BNC Connectors	11.75" (298 mm)	3.1 oz (88 g)

CA Series

Drop Cable Assist Tool

- Handy rubber cable grip designed to hold 59, 6, 7 & 11 series coaxial cable during the pulling operation & connector insertion
- Stable base is designed for most data/voice modular jacks when punching down wire
- Constructed from flexible, rubberized material to ensure maximum cable & wire gripping action



MODEL	PART #	CABLE COMPATIBILITY	DIAMETER	WEIGHT
CA	38842	59, 6, 7, 11 Coaxial Cable	3" (76 mm)	1.4 oz (41 g)

IT-F59,6,11 Series

"F" Connector Insertion & Flaring Combo Tool

- Combination tool designed to flare & insert "F" connectors into polyethylene-jacketed, plenum, tri-shield & quad-shield cables
- Plastic screwdriver-type handle provides optimum leverage during connector insertion for a proper connector & cable interface
- Heat-treated shank ensures tool durability & longevity



MODEL	PART #	"F" CONNECTOR	LENGTH	WEIGHT
IT-F59,6,11-FT6	38820	6	5" (127 mm)	3.5 oz (99 g)
IT-F59,6,11-FT-59	38821	59		



Torque Wrenches

TW Series Straight Head Torque Wrench



- Designed for proper connectorization at the "F" connector interface without damage caused by over or under-tightening
- Clicking sound indicates the connector is torqued to the proper setting
- High-visibility yellow padded grip reduces hand strain & rugged steel construction provides durability
- Tap port re-threader on the opposite end

TORQUE	WRENCH SIZE	MODEL	PART #	LENGTH	WEIGHT
20 in-lb (2.26 Nm)	7/16" (11.1 mm)	TW 207	35278	6.5" (165 mm)	6.5 oz (182 g)
	1/2" (12.7 mm)	TW 208	36275		
	9/16" (14.3 mm)	TW 209	36276		
25 in-lb (2.82 Nm)	7/16" (11.1 mm)	TW 257	38838		
	9/16" (14.3 mm)	TW 259	42225		
30 in-lb (3.39 Nm)	7/16" (11.1 mm)	TW 307	35260		
	1/2" (12.7 mm)	TW 308	35263		
	9/16" (14.3 mm)	TW 309	35280		
40 in-lb (4.51 Nm)	7/16" (11.1 mm)	TW 407	35261		
	1/2" (12.7 mm)	TW 408	35264		
	9/16" (14.3 mm)	TW 409	35281		
	5/8" (15.9 mm)	TW 4010	35284		



TW-AH



TW-AH-S



TW-AH-516



TW-AH-IT

TW-AH Series 20° Angled Head 7/16" Torque Wrenches



- Rugged steel construction provides durability & high-visibility yellow cushioned grip reduces hand strain
- Audible clicking sounds indicate when the connector is torqued to the correct setting

TW-AH
Angled torque wrench equipped with a tap port re-threader on the opposite end

TW-AH-S
Angled torque wrench with a speed head to quickly tighten without removing the wrench

TW-AH-516
Angled torque wrench with 5/16" socket on the opposite end to tighten tap face plates

TW-AH-IT
Angled torque wrench with "F" connector insertion tool on the opposite end

WRENCH TYPE	WRENCH SIZE	SERIES	TORQUE	MODEL	PART #	LENGTH	WEIGHT
Angled Head with Tap Port Re-Threader	7/16" (11.1 mm)	TW-AH	20 in-lb (2.26 Nm)	TW 207-AH	36435	7.125" (181 mm)	5.6 oz (159 g)
			25 in-lb (2.82 Nm)	TW 257-AH	38840		
			30 in-lb (3.39 Nm)	TW 307-AH	36437		
			40 in-lb (4.51 Nm)	TW 407-AH	36438		
Basic Angled Head	7/16" (11.1 mm)	TW-AH-B	10 in-lb (1.13 Nm)	TW 107-AH-B	43380	6" (152 mm)	5.0 oz (142 g)
			12 in-lb (1.36 Nm)	TW 127-AH-B	43400		
			20 in-lb (2.26 Nm)	TW 207-AH-B	37900		
			25 in-lb (2.82 Nm)	TW 257-AH-B	37903		
			30 in-lb (3.39 Nm)	TW 307-AH-B	37901		
			40 in-lb (4.51 Nm)	TW 407-AH-B	37902		
Angled Speed Head	7/16" (11.1 mm)	TW-AH-S	20 in-lb (2.26 Nm)	TW 207-AH-S	37995	5.75" (146 mm)	4.9 oz (139 g)
			25 in-lb (2.82 Nm)	TW 257-AH-S	38837		
			30 in-lb (3.39 Nm)	TW 307-AH-S	37997		
			40 in-lb (4.51 Nm)	TW 407-AH-S	37998		
Angled Head with 5/16" Socket	7/16" (11.1 mm)	TW-AH-516	20 in-lb (2.26 Nm)	TW 207-AH-516	37905	6" (152 mm)	5.0 oz (142 g)
			25 in-lb (2.82 Nm)	TW 257-AH-516	38839		
			30 in-lb (3.39 Nm)	TW 307-AH-516	37906		
			40 in-lb (4.51 Nm)	TW 407-AH-516	37907		
Angled Head with "F" Connector Insertion Tool	7/16" (11.1 mm)	TW-AH-IT	20 in-lb (2.26 Nm)	TW 207-AH/IT	36645	7.125" (181 mm)	5.6 oz (159 g)
			25 in-lb (2.82 Nm)	TW 257-AH/IT	37411		
			30 in-lb (3.39 Nm)	TW 307-AH/IT	36648		
			40 in-lb (4.51 Nm)	TW 407-AH/IT	36649		

Torque Wrenches

ITT 10-12 Series

10-12 in-lb "F" Connector Torque Wrench



- Tightens "F" connectors on all house electronics to a consistent 10 - 12 inch-lb of torque & prevents over-tightening of connectors & damage to equipment
- Reduces installer call-backs due to loose connectors, minimizes potential ingress/egress & signal loss issues
- Lightweight & rugged fiberglass-filled nylon construction

MODEL	PART #	TORQUE	LENGTH	WEIGHT
ITT 10-12	43060	10 - 12 in-lb (1.13 - 1.36 Nm)	2.25" (55 mm)	0.7 oz (19.84 g)

S-200 / S-200WS Series

Connector Security Shield



- Features an extended 7/16" shank for use with TW torque wrenches in security shield applications
- Durable, machined & heat-treated steel construction
- Equipped with a knurled handle for easy gripping & a steel loop for additional tool leverage, as well as a method of attachment to a tool belt

MODEL	PART #	CONNECTOR COMPATIBILITY	LENGTH	WEIGHT
S-200	35440	7/16" Hex Shielded "F"	2.75" (70 mm)	2.0 oz (57 g)
S-200WS	42195	PPC AquaTight® EX® Series		



TW-RA Series

90° Right Angle Head Torque Wrench

- Ideal tool for hard to access shielded "F" connector fittings where torque settings are required
- Equipped with a pivoting 90° security shield for easy longitudinal access to the cable & connector
- 7/16" insertion socket integrated with the tool handle
- Audible clicking sound indicates that the connector is torqued to the correct setting
- Rugged steel construction provides durability
- High-visibility yellow cushioned grip reduces hand strain

MODEL	PART #	TORQUE	SECURITY TOOL SECTION	HANDLE LENGTH	OVERALL LENGTH	WEIGHT
TW-227-RA-120	43225	22 in-lb (2.49 Nm)	4.71" (119.5 mm)	6.34" (160.9 mm)	11" (279 mm)	10.4 oz (295 g)

RTF-716 Series

7/16" "F" Connector Torque Wrench

- Ideal tool for torquing "F" connectors in high-density locations such as head ends
- Clockwise torquing motion or turn counter-clockwise to remove the "F" connector cable assembly
- An audible clicking sound indicates when the connector is torqued to the correct setting
- Proper torque settings improve the longevity of the system



TORQUE	SHAFT LENGTH	MODEL	PART #	LENGTH	WEIGHT
10 in-lb (1.1 Nm)	Short	RTF-716-1.1S	43078	8.0" (210 mm)	4.7 oz (133 g)
	Long	RTF-716-1.1L	43079	12.0" (310 mm)	5.1 oz (145 g)
17 in-lb (2.0 Nm)	Short	RTF-716-2S	43182	8.0" (210 mm)	4.7 oz (133 g)
	Long	RTF-716-2.5S	43080	8.0" (210 mm)	4.7 oz (133 g)
20 in-lb (2.5 Nm)	Short	RTF-716-2.5S	43080	8.0" (210 mm)	4.7 oz (133 g)
	Long	RTF-716-2.5L	43081	12.0" (310 mm)	5.1 oz (145 g)
30 in-lb (3.4 Nm)	Short	RTF-716-3.4S	43185	8.0" (210 mm)	4.7 oz (133 g)
	Long	RTF-716-3.4L	43186	12.0" (310 mm)	5.1 oz (145 g)
34 in-lb (3.8 Nm)	Short	RTF-716-3.8S	43085	8.0" (210 mm)	4.7 oz (133 g)
	Long	RTF-716-3.8L	43086	12.0" (310 mm)	5.1 oz (145 g)

RTF-716 Series Replacement Part Ordering Guide

REPLACEMENT ITEM	TORQUE	MODEL	PART #	LENGTH	WEIGHT
Short Shaft Only	N/A	RTF-716S	43087	7.9" (200 mm)	1.1 oz (30 g)
Long Shaft Only	N/A	RTF-716L	43088	11.8" (300 mm)	1.5 oz (42 g)
Torque Handle Only	10 in-lb (1.1 Nm)	RTF-716-1.1	43180	5.0" (130 mm)	3.6 oz (103 g)
	13 in-lb (1.5 Nm)	RTF-716-1.5	43181		
	20 in-lb (2.5 Nm)	RTF-716-2.5	43082		
	30 in-lb (3.4 Nm)	RTF-716-3.4	43187		
	34 in-lb (3.8 Nm)	RTF-716-3.8	43083		

Can Wrenches & Trap Wrenches


CW-71638 Series

7/16" & 3/8" Socket Can Wrench

- Combination tool tightens nuts on binding post terminals
- Equipped with deep 7/16" & 3/8" thin-wall sockets in one tool with clear markings to indicate the sizing on each end of the socket
- Allows universal access to network interface devices, telephone boxes & pedestals
- Ribbed handle provides greater leverage & torquing capability



MODEL	PART #	SOCKET SIZE(S)	SOCKET DEPTH	HANDLE MATERIAL	LENGTH	WEIGHT
CW-71638	38795	7/16"; 3/8"	1.5" (38.1 mm)	Impact-Resistant Polymer	7" (177.8 mm)	4.9 oz (139 g)

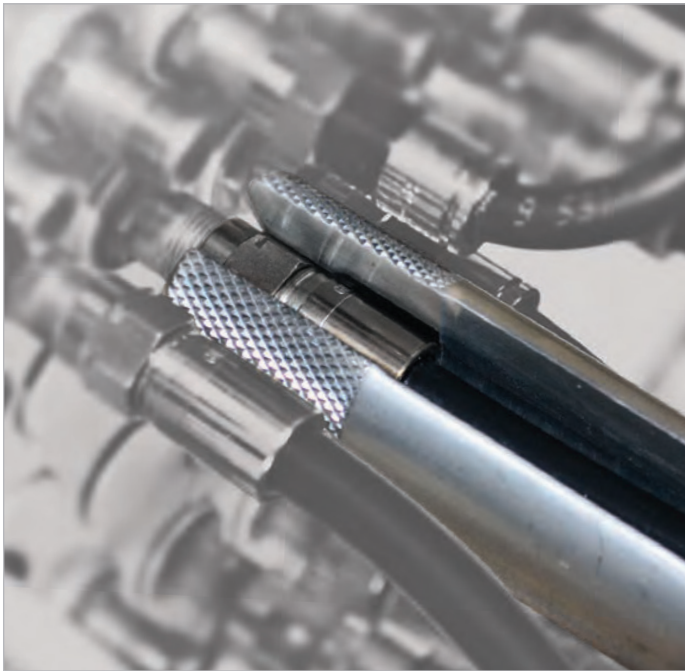

TT 716 Series

7/16" Hex "F" Fitting Trap Wrench



- Lightweight 7/16" hex head "F" fitting trap wrench is designed for compatibility with all standard traps
- Durable machined heat-treated steel & anodized aluminum construction ensures tool longevity

MODEL	PART #	COMPATIBILITY	LENGTH	WEIGHT
TT 716	36780	7/16" Hex "F" Fittings	7.5" (190 mm)	2.5 oz (71 g)

TST 716 Series

Trap/Security Wrench Combo Tool




- Combination tool with a trap wrench & 7/16" (11.1 mm) hex "F" fitting security wrench fits all standard traps, as well as all sizes & types of metal security sleeves
- Durable & lightweight, anodized aluminum & steel construction

MODEL	PART #	COMPATIBILITY	LENGTH	WEIGHT
TST 716	36785	7/16" Hex "F" Fittings	7.5" (190 mm)	2 oz (57 g)

T-7916 Series

"F" Fitting Tap Tool

- Convenient 7/16" (11.1 mm) & 9/16" (14.3 mm) hex tool is compatible with most 59/6 & some 7/11 connectors
- Equipped with a rugged, aluminum body to ensure longevity
- All metal tool engineered to efficiently tighten "F" connectors on tap ports where security shields are not used



MODEL	PART #	HEX SIZE(S)	CONNECTOR MANUFACTURER	CONNECTOR TYPE	59/6 HEX	7/11 HEX	MATERIAL	LENGTH	WEIGHT
T-7916	37825	7/16" (11.1 mm) & 9/16" (14.3 mm)	Arris	Digicon® "S"	•		Aluminum	5" (127 mm)	5 oz (142 g)
				Digicon® "T"	•				
			Corning Gilbert	ULTRA-EASE™	•				
				ULTRA-EASE™-T		•			
			PCT	DRS	•				
			PPC	EX	•	•			
				EX-XL	•				
			Belden	SNAP-N-SEAL®	•	•			
Stirling	SPL	•	•						

Termination Tools



NS6270 Series Cam-Style Terminator Tools



- "Cam-style" terminator tool designed for use with various Gilbert terminators & is available in short or long lengths to accommodate space restraints
- Durable blue anodized aluminum construction

MODEL	PART #	TERMINATOR TYPE	LENGTH	WEIGHT
NS6270-1	42160	NS-5762-3 /-9 /-11 /-13 /-15	5.125" (130.2 mm)	4.1 oz (127.5 g)
NS6270-3	42170	NS-5762-3 /-9 /-11 /-13 /-15	9.125" (231.8 mm)	6.0 oz (186.6 g)



THT-532 Series 5/32" Telephone Hex Tool



- Designed to easily open 5/32" hex tamper-resistant fasteners on communication pedestals & boxes
- Heat-treated carbon steel shaft provides durability & tool is equipped with a 4" long handle for extra leverage

MODEL	PART #	COMPATIBILITY	LENGTH	WEIGHT
THT-532	38410	5/32" Hex Shielded Tamper-Resistant Fasteners	10" (254 mm)	3.6 oz (101 g)

LTT-4 & LTT-7 Series Locking Terminator Tools



LTT-4

Compact 4.5" (114 mm) tool for a wide variety of popular industry terminators with a shortened 1" (25.4 mm) diameter handle for easy leverage



LTT-7/V23

Dual-sided combination tool equipped with Viewsonics 2 & 3-prong on the opposite end



LTT-7

Dynamic tool designed to accommodate a wide variety of popular industry terminators



LTT-7/T-P

Dual-sided combination tool compatible with PPC-502 & T&B CLF/TRLF terminators on the other end



MODEL	PART #	CABLE MANUFACTURER	CABLE TYPE	LENGTH	WEIGHT
LTT-4	36865	Corning Gilbert	GTP / NS-5762-5 / NS-5762-7 / NS-3268-5	4.5" (114 mm)	1.9 oz (54 g)
		PPC	LFT / PST		
		PCT	TPG		
		Viewsonics	TR75GTL		
		Signal Vision	SV-LT / SV-LTA		
		PDI, Inc.	PTP-59 / PTP-59LR / PTP-59-PB		
LTT-7	36855	Corning Gilbert	GTP / NS-5762-5 / NS-5762-7 / NS-3268-5	8.0" (203 mm)	4.2 oz (118 g)
		PPC	LFT / PST		
		PCT	TPG		
		Viewsonics	TR75GTL		
		Signal Vision	SV-LT / SV-LTA		
		PDI, Inc.	PTP-59 / PTP-59LR / PTP-59-PB		
LTT-7/V23	38705	Corning Gilbert	GTP / NS-5762-5 / NS-5762-7 / NS-3268-5	8.25" (210 mm)	4.3 oz (123 g)
		PPC	LFT / PST		
		PCT	TPG		
		Viewsonics	TR75GTL / TR75GTL-PB / TRWGTL / TRWRLT / TRWRLT3 TR75LT / TR75LT-PB / TR75LT3 / TR75LT3-PB		
		Signal Vision	SV-LT / SV-LTA		
		PDI, Inc.	PTP-59 / PTP-59LR / PTP-59-PB		
LTT-7/T-P	38305	Corning Gilbert	GTP / NS-5762-5 / NS-5762-7 / NS-3268-5	7.875" (200 mm)	4.3 oz (123 g)
		PPC	LFT / PST / 502 LTR / 502 LTR NR		
		PCT	TPG		
		Viewsonics	TR75GTL / TR75GTL-PB / TRWGTL		
		Signal Vision	SV-LT / SV-LTA		
		PDI, Inc.	PTP-59 / PTP-59LR / PTP-59-PB		
		T&B	CLF / CLFA / TRLF / TRLFA		

Flaring & Deburring Tools



DBT-U Series 50 & 70 Ohm Center Conductor Deburring Tool



- Designed to Deburr center conductors from 0.05" to 0.23" (1.27 to 5.84 mm) on 50 & 75 ohm hard-line cables
- Compatible with copper & aluminum with copper-clad cables; ideal for LMR240 to LMR600 Times Microwave Systems cables
- Large plastic screwdriver-type handle provides exact leverage while rotating the tool

MODEL	PART #	CONDUCTOR RANGE	LENGTH	WEIGHT
DBT-U	42600	0.05" - 0.230" (1.27 - 5.84 mm)	4.75" (121 mm)	3.4 oz (95 g)



FDT 58-75 Series 75 Ohm Center Conductor Flaring & Deburring Tool



- Efficiently & precisely flares & deburrs the outer conductor on 75 ohm corrugated copper cable
- Other end of the tool quickly deburrs the center conductor of the cable
- Large plastic screwdriver type handle provides exact leverage while rotating the tool

MODEL	PART #	CABLE COMPATIBILITY	LENGTH	WEIGHT
FDT 58-75	42250	Eupen 7168, A7168; Commscope® CA519	5.5" (140 mm)	5.5 oz (156 g)



FT Series 50 Ohm Annular Corrugated Cable Flaring Tools



- Efficiently & precisely flares the outer conductor end on 50 ohm Annular Flexible Foam Core Cable
- Large plastic screwdriver-type handle provides exact leverage while rotating the tool

MODEL	PART #	CABLE DIAMETER	LENGTH	WEIGHT
FT-12-50	36640	½" (12.7 mm)	5" (127 mm)	3.5 oz (99 g)
FT-78-50	36845	⅞" (22.2 mm)		
FT-114-50	37400	1 ¼" (31.75 mm)		
FT-158-50	37405	1 ⅝" (41.28 mm)		

Conductor Cleaning Tools

CC-100 & CC-200 Series Cable Center Conductor Cleaners & Scrapers



- Designed to remove residual dielectric from the conductor on all sizes of trunk & distribution cables
- Efficiently & accurately removes the dielectric close to the aluminum sheath without risk of damage
- "High-visibility" red & yellow tool bodies provide quick identification while on a job



MODEL	PART #	COLOR	REPLACEMENT BLADE KIT TYPE / PART #	LENGTH	WEIGHT
CC-100	16710	Red	"V" Notched Blade Kit 16722	4.25" (108 mm)	2.3 oz (64 g)
CC-200	16730	Yellow	Clear Plexiglas® Scraping Blade Kit 16725		
CC-200 EUR	42000	Yellow	Clear Plexiglas® EUR Scraping Blade Kit 42003		



Continuity Testers

RPT-AAA Series


Premise Toner Drop Cable Continuity Tester




- Electronic testing tool designed to check the circuit integrity in new or installed cable up to 5,000 feet (1,500 meters) in length
- LED indicates DC shorts, splitters & other self-grounding devices in cable while a loud audio tone identifies the line carrying the signal
- Equipped with right angle male push-on connector to maneuver in tight areas & female push-on connector for speed toning
- Automatic shut-off switch preserves battery life
- Tool includes a pocket clip & (1) AAA 1.5V battery

MODEL	PART #	MAX. CABLE LENGTH	PUSH-ON CONNECTORS	TONER SECTION REPLACEMENT PART #	LENGTH	WEIGHT
RPT-AAA	42345	5,000 ft (1,500 m)	Right Angle Male & Female	42349	4.875" (124 mm)	4 oz (113 g)

Detach Toner from RPT-AAA Body

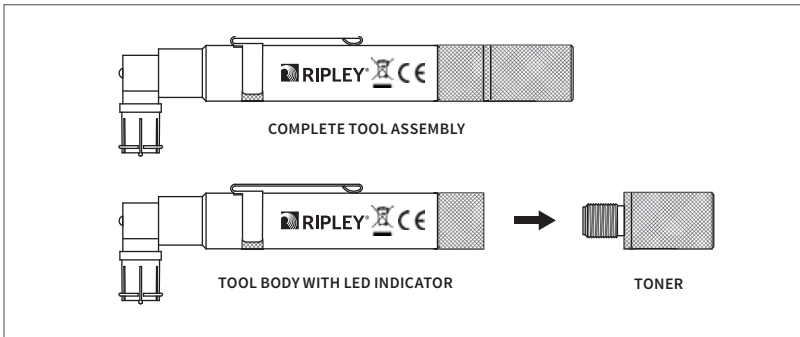

Testing Straight Coaxial Cable Line

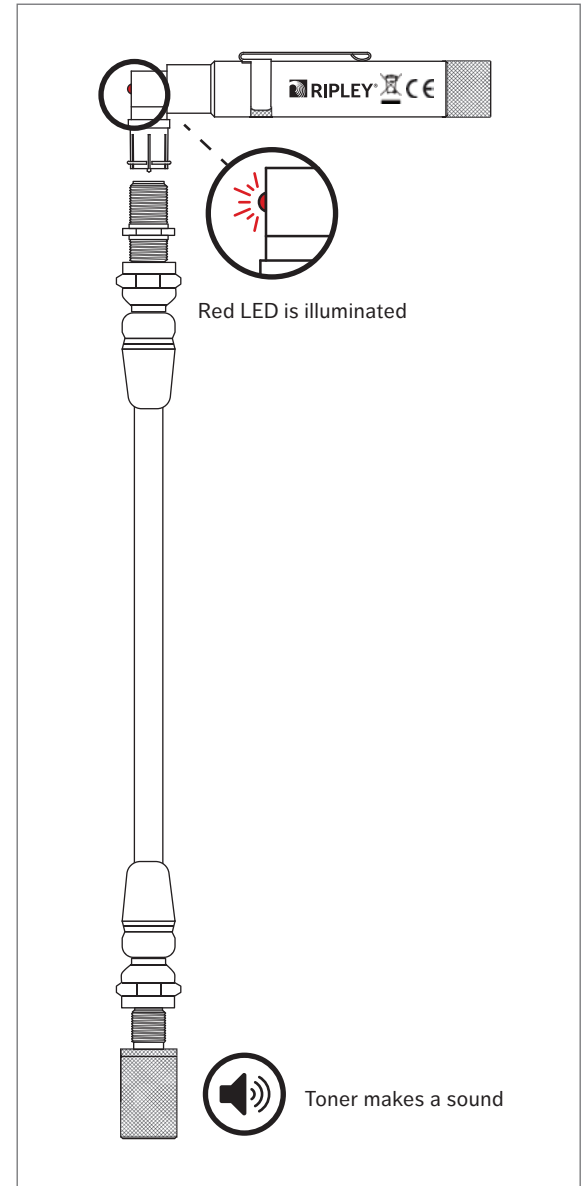

Testing Coaxial Cable with Splitter Present

