

ShinewayTech® compact palmOTDR now offers even more testing capacities, flexibility and value with combination of 850/1300/1310 /1490/1550/1625/1650nm (Mono/double/triple wavelength) OTDR , 1310/1490/1550nm PON Power Meter, Stabilized Laser Source and VFL. The OTDR wavelengths cover the applications of regular end-to-end fiber characterization (1310/1550nm), premise/enterprise LAN testing (850/1300nm), FTTx fiber link construction verification (1490nm) and PON live fiber troubleshooting (1625/1650nm with filter). The integrated PON Power Meter can perform in-service testing of all PON signals (1310/1490/1550nm) on any spot of the network featuring pass-through design and burst mode support. palmOTDR is your ultimate solution to meet various testing requirements of entire fiber network.




Most Compact High-Performance OTDR


- ◆ Comprehensive fiber applications, ideal for LAN/WAN/FTTx certification & troubleshooting:
SM: 1310/1490/1550, 1625/1650nm (with filter), up to 50dB
MM: 850/1300nm, 21/24dB
- ◆ Fault locating, fiber length/loss measurement, connector/splice/ splitter/ macro bend/fiber-end detection
- ◆ Built-in PON Power Meter for Triple-play live measurement
- ◆ Optional Stabilized Laser Source, SM/MM Power Meter and VFL
- ◆ FTTx in-service testing/ Testing through splitter:(1625/1650nm with filter)
- ◆ Splitter & fiber-end identifiable
- ◆ Auto/Manual(2-point/5-point)/Averaging/Real-time test
- ◆ Pass/Fail assessment and ORL test function
- ◆ Quick start: <5 seconds
- ◆ Perfect user interface, handheld & lightweight (1kg)
- ◆ Hotkeys: Easiest operation in the world, push-and-test
- ◆ 1000 test records storage
- ◆ Bell core file format (.sor)
- ◆ PC software for batch data processing
- ◆ USB data interface, driver-free
- ◆ Multiple languages: EN/DE/IT/FR/ES/PT/RU/KR/VN/CN etc.
- ◆ 8 hrs continuous operation/20 hrs standby
- ◆ Dust-shock proof (2m drop test)
- ◆ CE, FCC, FDA certificates

In-service Testing (Through Splitter)

- In-service testing (1625nm with filter)

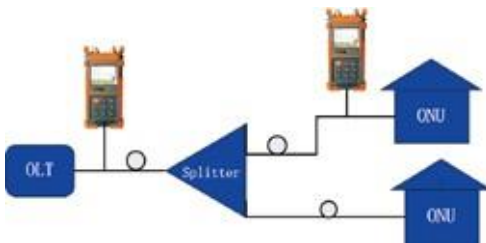


- Testing through splitter, splitter and fiber end identifiable

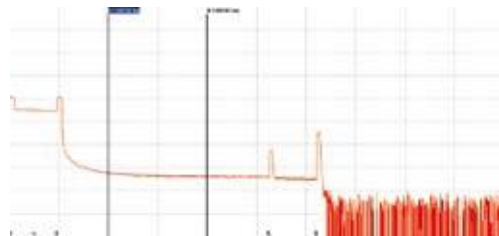


Live Optical Signal Check

When the OTDR tests with 1310/1490/1550nm wavelength, the live signals transmitting in the tested fiber may not only affect OTDR measurements but also damage the equipment connected to the network (SDH/WDM/ PON) and OTDR receiver. The palmOTDR series avoids the problem by starting in-service communication check before testing with message warning and auto termination functions to effectively protect test instruments and communications equipment.

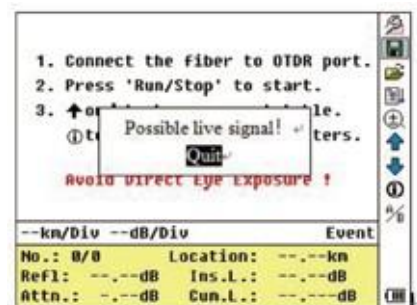

Built-in PON Power Meter


The integration of a PON Power Meter into such a small unit of the palmOTDR makes FTTx certification and troubleshooting an exciting experience and efficient workmanship. The PON Power Meter module can perform in-service testing of all PON signals (1310/1490/1550nm) on any spot of the network featuring pass-through design, burst mode and Pass/Warning/Fail assessment function, which can greatly help you evaluate PON signals transmission quality.

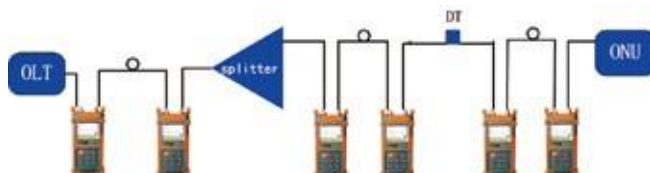

Threshold			
Threshold Name:			
	1310nm	1490nm	1550nm
FAIL	3.00	-2.50	8.50
PASS	-1.50	-21.00	-9.50
WRNG	-2.50	-24.00	-12.50
FAIL			


Extended Stabilized Laser Source

Stabilized Laser Source shares palmOTDR optical port and work on the same working wavelength of palmOTDR.

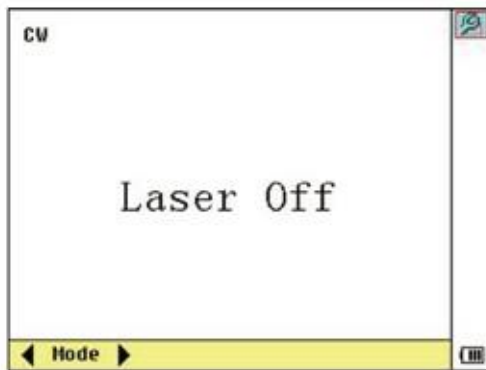


Extended Optical Power Meter

- No warm-up
- Absolute power value and power loss measurement
- High accuracy, zero shift
- Power monitoring, high-low limit setting
- Reference setting

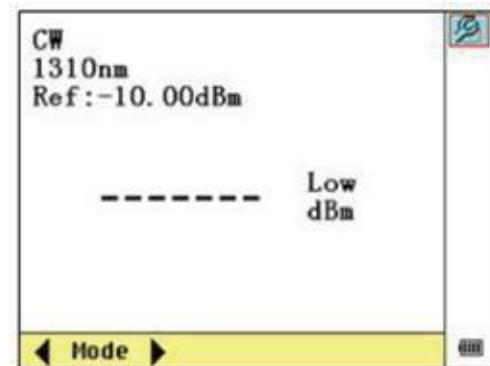

Extended Optical Connector Inspector Module (MCI100 module)

- Focusing knob for fast focus
- Eye-safe and clear video viewing
- Interchangeable connector tips (male and female, PC and APC, 1.25mm and 2.5mm etc.)

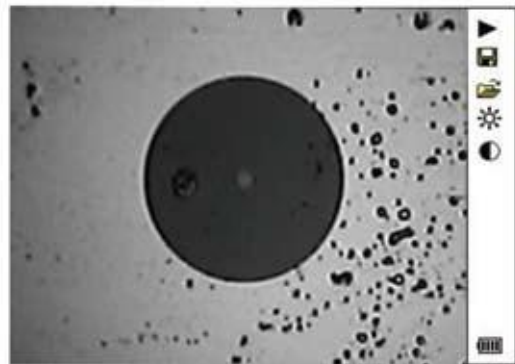


Optimized Interface design

- Graphical User Interface
- Color and High Resolution




OTDR LinkImage Software

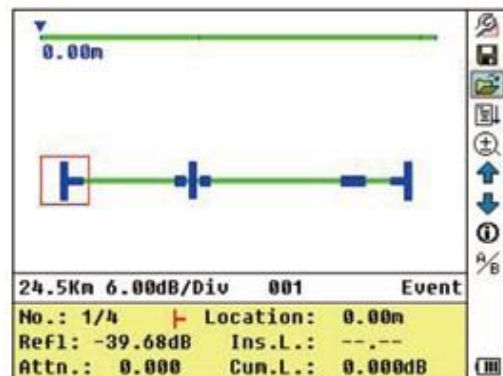

OTDR Trace Manager Software

TraceManager software can display, analyze and edit trace files, generate and print comprehensive test and analysis reports in various forms.

- Trace viewing, events analysis
- Batch editing and flexible printing
- Trace viewing, events analysis
- Multi traces comparison
- Batch editing and flexible printing
- Bidirectional testing (Optional)
- CSV/ASCII report formats

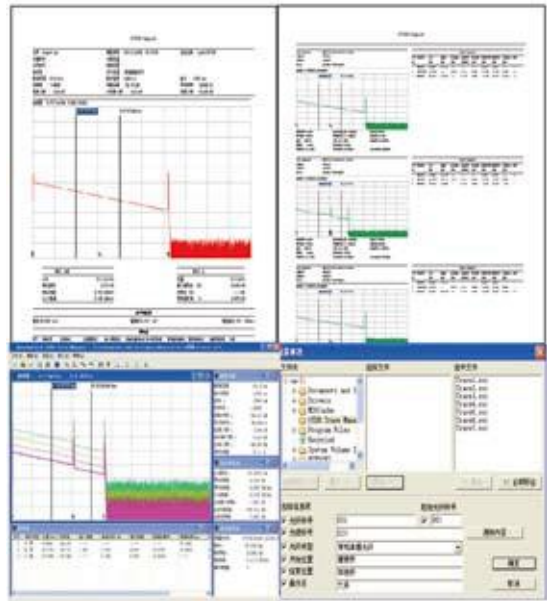

Specifications

	Model ⁽¹⁾		Wavelength (±20nm)	Dynamic Range ⁽²⁾	EDZ (m) ⁽³⁾	ADZ (m) ⁽³⁾
	Basic	Advanced				
	palmOTDR-M20AE	palmOTDR-M20AE-VPSI	850/1300	21/24dB	1.5	5
	palmOTDR-S20AE	palmOTDR-S20AE-VPSI	1310/1550	32/30dB	1.8	5
	palmOTDR-S20BE	palmOTDR-S20BE-VPSI	1310/1550	35/34dB	1.5	5
	palmOTDR-S20C/N	palmOTDR-S20C/N-VPSI	1310/1550	40/38dB	0.8	4.5
	palmOTDR-S20D/N	palmOTDR-S20D/N-VPSI	1310/1550	45/43dB	0.8	4.5
	palmOTDR-S20F	palmOTDR-S20F-VPSI	1310/1550	50/48dB	0.8	4.5
	palmOTDR-S20C/P	palmOTDR-S20C/P-VPSI	1310/1490/1550	38/37/37dB	0.8	4.5
	palmOTDR-S20C/X	palmOTDR-S20C/X-VPSI	1310/1550/1625 ⁽⁴⁾	38/37/37dB	0.8	4.5
	palmOTDR-P11C	palmOTDR-P11C-SI	1625 ⁽⁴⁾	37dB	0.8	4.5
	palmOTDR-P31C	palmOTDR-P31C-SI	1310/1550/1625 ⁽⁴⁾	38/37/37dB	0.8	4.5
	palmOTDR-Q40A	palmOTDR-Q40A-VPSI	850/1300/1310/1550	21/24/32/30dB	1.5	4.5
Selectable Range (Km)	0.1, 0.3, 0.5, 1.3, 2.5, 5, 10@850nm; 0.1,0.3,0.5,1.3,2.5,5,10,20,40,80@1300nm; 0.3, 1.3, 2.5, 5, 10, 20, 40, 80, 120, 160, 240@others					
Pulse Width	10ns, 30ns, 100ns, 300ns, 1µs@850nm; 10ns, 30ns, 100ns, 300ns, 1µs, 2.5µs@1300nm; 5ns, 10ns, 30ns,100ns, 300ns, 1µs,2.5µs, 10µs, 20µs@others					
Averaging Time	Quick, 15s, 30s, 1min, 2min, 3min					
Distance Measure Accuracy	±(1m+5×10 ⁻⁵ ×distance+sampling space)					
Attenuation Detect Accuracy	±0.05dB/dB					
Reflection Detect Accuracy	±4dB					

Data Storage	1000 records
Connectivity	USB
Connector	FC/PC (Interchangeable SC, ST; optional LC)
Power Supply	NiMH Battery / AC Adapter
Battery Life	8 hrs continuous operation, 20 hrs standby (on one charge); recharging time < 4 hrs
Operating Temperature	-20°C to 50°C
Storage Temperature	-40°C to 70°C
Relative Humidity	0 to 95% (non-condensing)
Weight	1kg (2.2 lbs)
Dimensions (HxWxT)	220x110x70mm (8.7x4.3x2.7 inch)

Functional Module Specifications

Visible Fault Locator Module⁽⁵⁾

Wavelength ($\pm 20\text{nm}$)	650nm
Output Power (dBm)	≥ -3
Max Measurement Range	5 Km

Stabilized Laser Source Module⁽⁵⁾

Wavelength ($\pm 20\text{nm}$)	Same as OTDR working wavelength ⁽⁵⁾
Output Power (dBm)	≥ -7

Optical Power Meter Module⁽⁵⁾

Calibrated Wavelength (nm)	850,1300,1310,1490,1550,1625
Power Range (dBm)	-70 to +6 (-60 to +6 @ 850nm)
Detector Type	InGaAs
Display Resolution	0.01dB
Accuracy	$\pm 5\% \pm 0.01\text{nW}$ ($\pm 0.5\text{dB}@850\text{nm}$)
MOD Identification	1K, 2K Hz

PON Power Meter Module⁽⁶⁾

Calibrated Wavelength	1310nm	1490nm	1550nm
Measurement Range (dBm)	-40 to +8 (Burst mode: -30 to +8)	-40 to +8	-40 to +20
Spectral Passband (nm)	1310 \pm 40	1490 \pm 10	1550 \pm 10
Power Uncertainty (dB)	≤ 0.5		
Display Resolution (dB)	0.01		
Insertion Loss (dB)	≤ 1.5		
Threshold	60 user-definable threshold sets		
Data Storage	1200 records		

MCI100 Optical Connector Inspector Module	
Zoom	250X
Resolution	0.75µm
Focus	Manual
Adaptor	Standard: 25-U-M: FC/SC/ST/E2000 UPC male; 125-U-M: LC/MU UPC male; 25-U-F: FC/SC/ST/E2000 UPC female; LC-U-F: LC UPC female; Optional: 125-A-M: LC/MU APC male; 25-A-M: FC/SC/ST/E2000 APC male; SC-A-F: SC APC female; FC-A-F: FC APC female; LC-A-F: LC APC female;
Weight / Size	150g/ 165x38x35mm

* Specifications subject to change without notice

Notes:

- (1) Specifications describe the instrument's warranted performance, measured with typical PC-type connectors. Uncertainties due to the refractive index of fiber are not considered.
- (2) The dynamic range is measured at maximum pulse width and averaging time of 3 minutes.
- (3) Conditions for dead zone measurement: Reflection event is at 0.6Km, reflection intensity is less than -45dB, event dead zone is measured with pulse width of 10ns; attenuation dead zone is measured with pulse width of 10ns.
- (4) 1625nm can be replaced by 1650nm.
- (5) Visible fault locator module, Stabilized laser source module and Optical power meter module is standard on -VPSI models.
Stabilized laser source shares palmOTDR optical port and work on the same working wavelength of palmOTDR.
- (6) PON power meter module is standard on P11C and P31C.

Order Information

Standard Package Includes:

Instrument, FC/PC connector, NiMH battery, TraceManager software CD, USB Data cable, AC adaptor, Soft carrying case, Warranty card, Certificate of calibration, Quick reference guide.

Options:

- palmOTDR-XXXX-VPSI: Visible Fault Locator module, Optical Power Meter module, Stabilized Laser Source module and Optical Connector Inspector Module for palmOTDR
- MCI100 Module: Optical Connector Inspector
- LM100 Function: LinkImage software